



TYGER®

TYGER RIDER®

TG-SS2T35078

BEFORE INSTALLATION


READ INSTRUCTIONS CAREFULLY BEFORE STARTING INSTALLATION. REMOVE CONTENTS FROM BOX AND VERIFY ALL PARTS ARE PRESENT. FAILURE TO IDENTIFY DAMAGE BEFORE INSTALLATION COULD LEAD TO A REJECTION OF ANY CLAIM. IF MISSING PARTS OR ANY DAMAGE FOUND, PLEASE TAKE A PICTURE FOR THE CLAIM PURPOSE. TO FILE YOUR CLAIM, PLEASE VISIT: WWW.TYGERAUTO.COM/CONTACT

TORQUE VALUES

Fastener Size	Class 8.8 Torque (ft-lbs)	Class 10.9 Torque (ft-lbs)
6mm	6-7	6-7
8mm	15-16	22-23
10mm	31-32	44-45
12mm	54-55	78-79
14mm	87-88	125-126

Parts List

- x1 Driver/Left Sidebar
- x1 Passenger/Right Sidebar
- x1 Driver/Left Front Mounting Bracket
- x1 Passenger/Right Front Mounting Bracket
- x1 Driver/Left Center Mounting Bracket
- x1 Passenger/Right Center Mounting Bracket
- x1 Driver/Left Rear Mounting Bracket
- x1 Passenger/Right Rear Mounting Bracket
- x12 8-1.25mm x 30mm Hex Bolts
- x12 8-1.25mm x 25mm Combo Hex Bolts
- x12 8mm Lock Washers
- x12 8mm x 24mm OD x 2mm Flat Washers

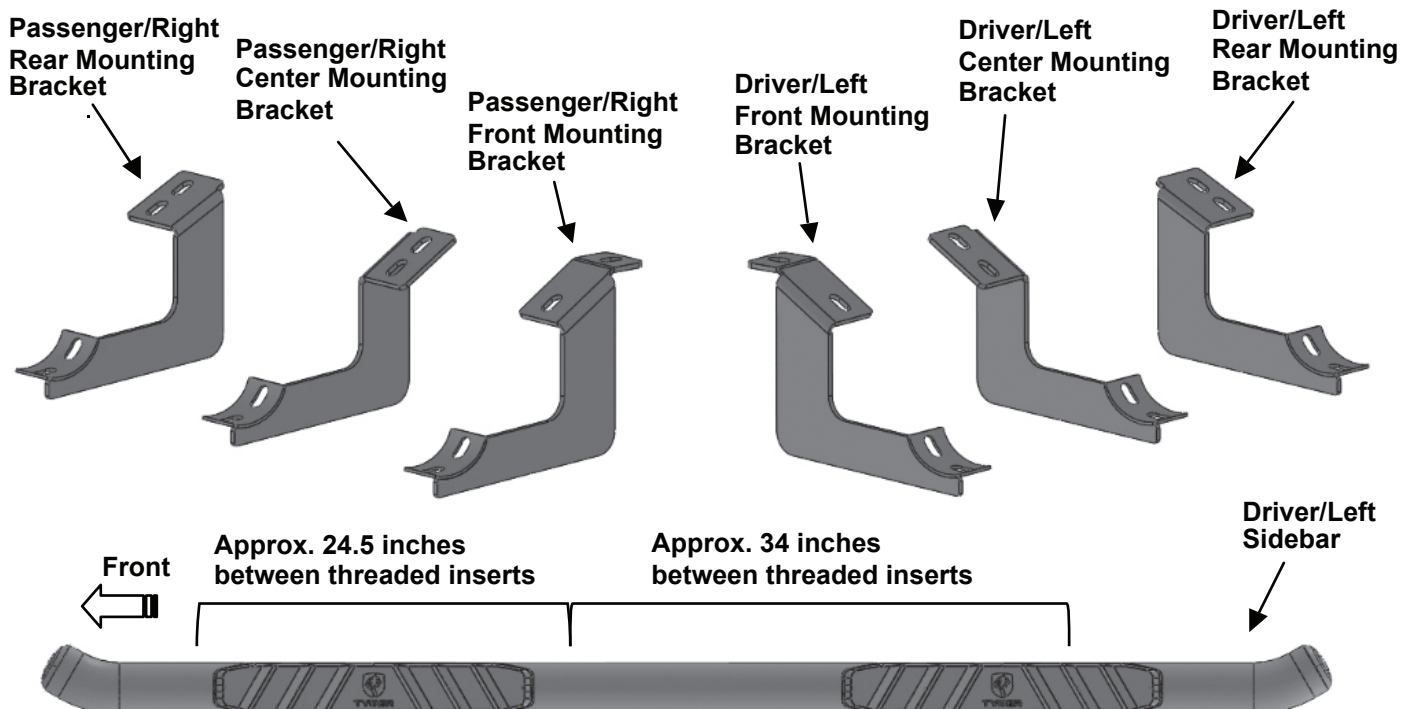



TYGER®


STEP 1

REMOVE CONTENTS FROM BOX. VERIFY ALL PARTS ARE PRESENT. READ INSTRUCTIONS CAREFULLY. USE ILLUSTRATION TO IDENTIFY BRACKETS AND RUNNING BOARDS.

STEP 2

Starting on the Driver/Left front of the vehicle, remove the plastic plugs or hex bolts covering the (2) threaded holes in the floor panel, (Fig 1). Installation will use the 1st, 2nd and 3rd mounting locations.

Remove plastic plugs or
factory hex bolts (if equipped)

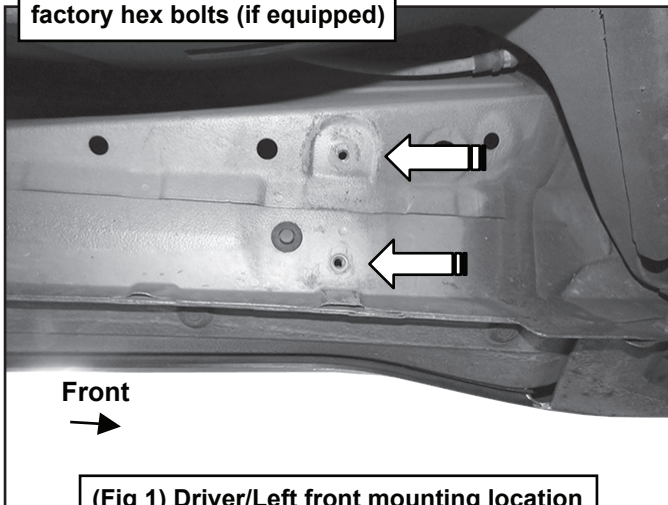

(Fig 1) Driver/Left front mounting location


STEP 3

Select the Driver/Left Front Mounting Bracket, (Fig 2). Attach the Bracket to the floor panel with (2) 8mm Hex Bolts, (2) 8mm Lock Washers and (2) 8mm Flat Washers, (Figs 2-3). Do not tighten hardware at this time.


(2) 8mm Hex Bolts

(2) 8mm Lock Washers

(2) 8mm Flat Washers

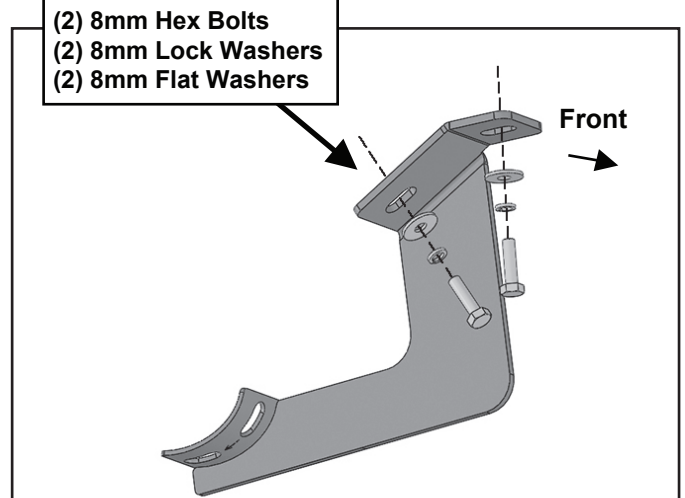

(Fig 2) Attach Driver/Left Front Mounting Bracket to the floor panel

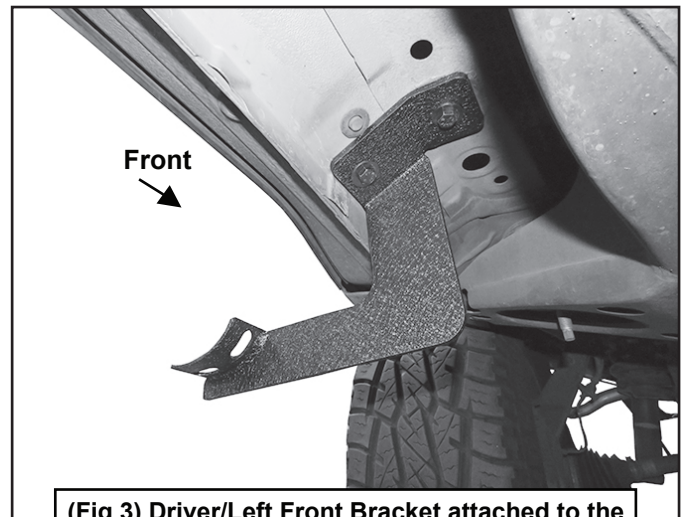


(Fig 3) Driver/Left Front Bracket attached to the floor panel

STEP 4


Next, move to the second mounting location, (Fig 5). Select the Driver/Left Center Mounting Bracket. **IMPORTANT:** The Center and Rear Mounting Brackets look similar but each one is unique. Use the illustration above and Fig 4 to help identify each Bracket. Repeat Step 1 to attach the Driver/Left Center Mounting Bracket to the floor panel, (Figs 6-7).




TYGER®

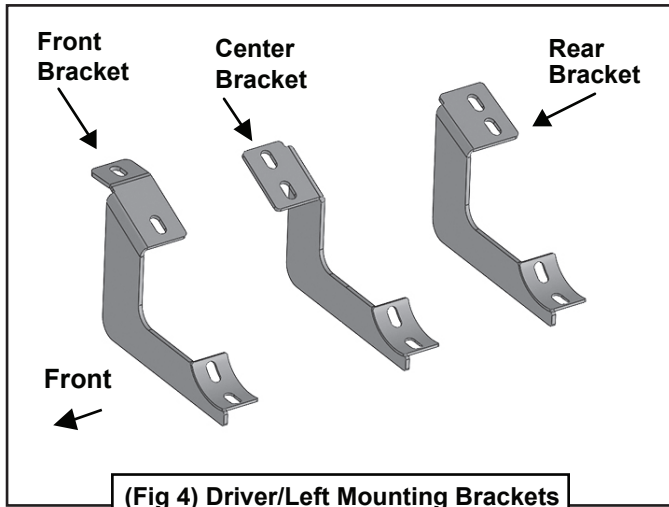


(Fig 4) Driver/Left Mounting Brackets

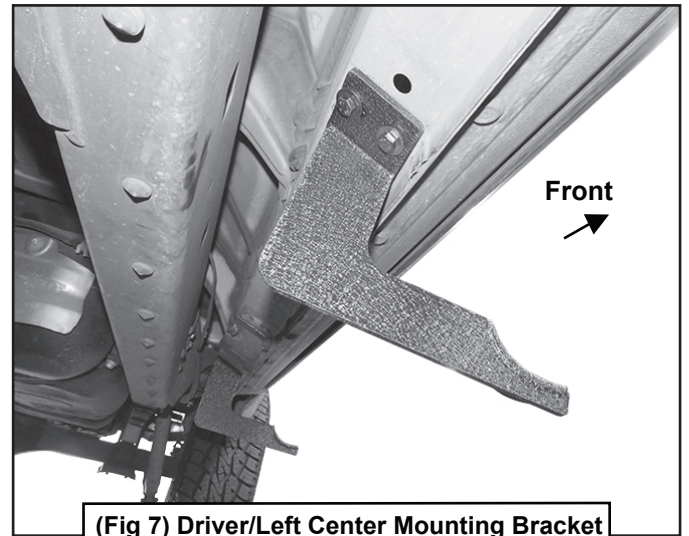

(Fig 7) Driver/Left Center Mounting Bracket attached to the floor panel

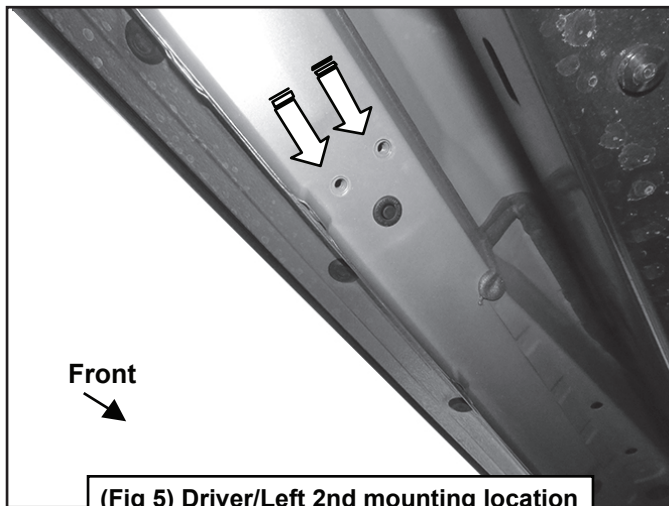


(Fig 5) Driver/Left 2nd mounting location

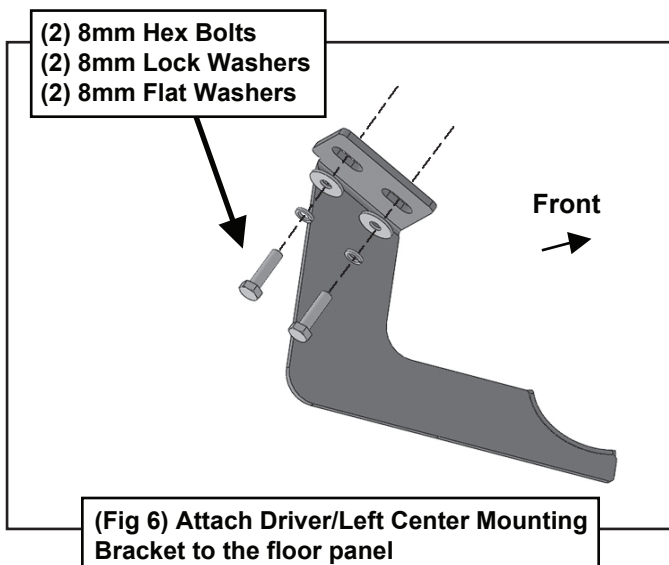

(Fig 6) Attach Driver/Left Center Mounting Bracket to the floor panel

STEP 5


Continue to the third mounting location, (Fig 8). Repeat Step 1 to attach the Driver/Left Rear Mounting Bracket to the floor panel, (Fig 9).

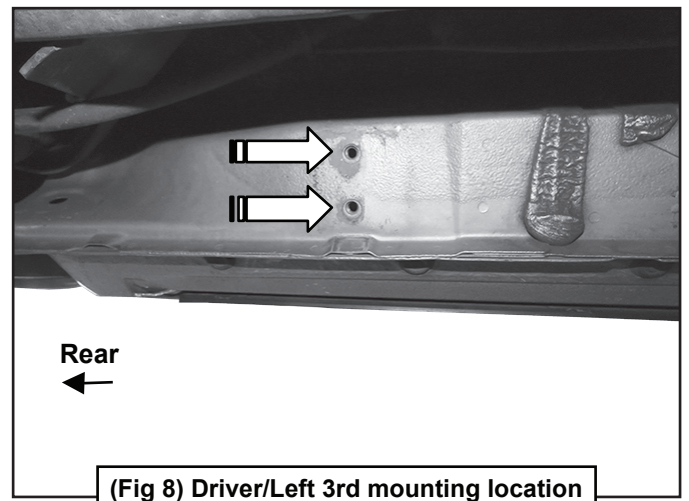

(Fig 8) Driver/Left 3rd mounting location



TYGER[®]

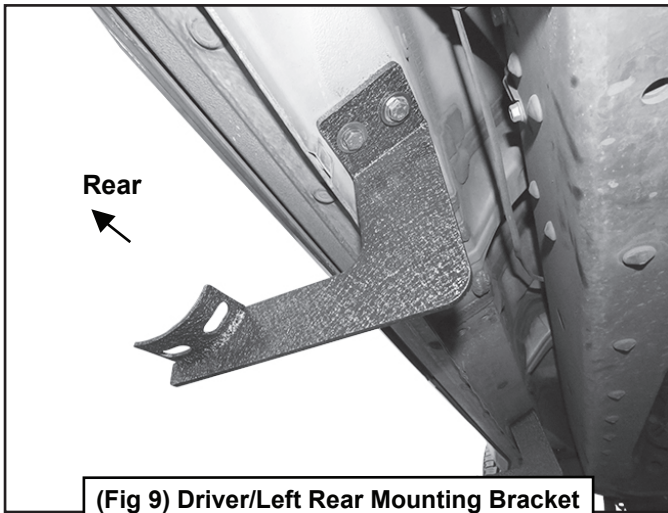


(Fig 9) Driver/Left Rear Mounting Bracket attached to the floor panel




(Fig 11) Driver/Left Sidebar attached to the Front Mounting Bracket

STEP 6


Carefully unwrap the Driver/Left Sidebar. Use the illustration above to help determine the correct Sidebar. Place the Sidebar on top of the (3) Mounting Brackets. Attach the Sidebar to the Mounting Brackets with (6) 8mm Combo Hex Bolts, (Figs 10-13). Do not tighten at this time.

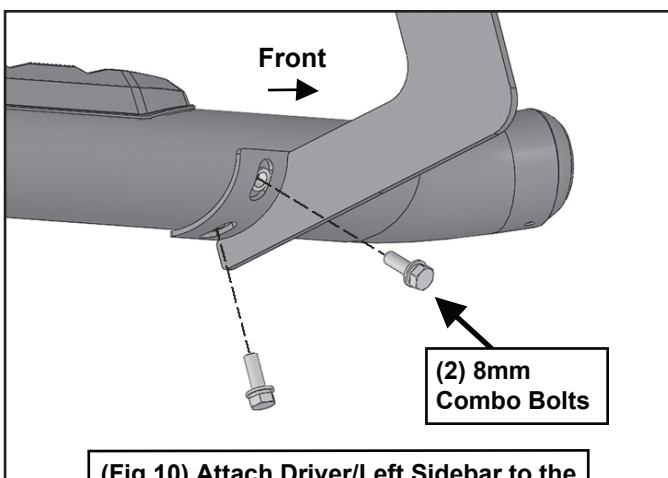

(Fig 10) Attach Driver/Left Sidebar to the Front Mounting Bracket

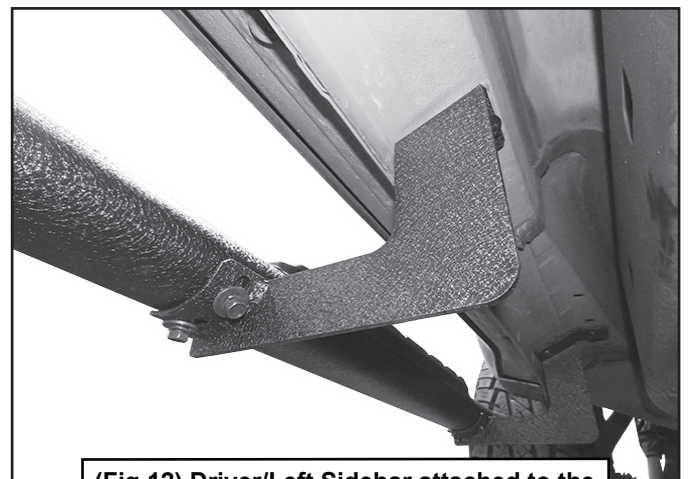

(Fig 12) Driver/Left Sidebar attached to the Center Mounting Bracket

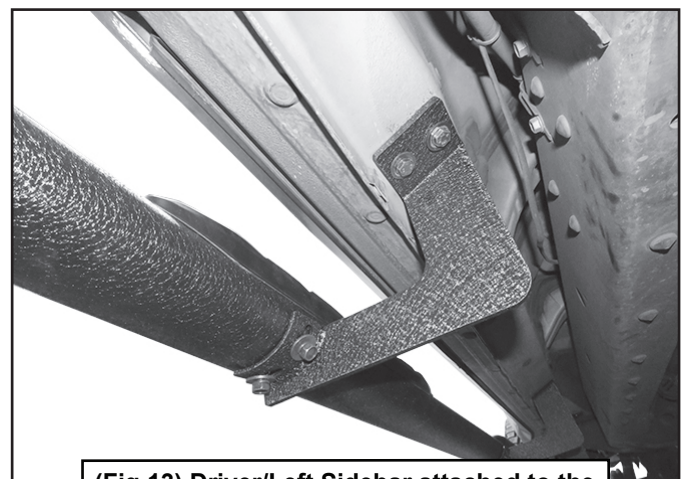

(Fig 13) Driver/Left Sidebar attached to the Rear Mounting Bracket



TYGER®

STEP 7

Level and adjust the Sidebar and tighten all hardware.

STEP 8

Repeat Steps 2-7 to attach the Passenger/Right Sidebar to the floor panel.

STEP 9

Do periodic inspections to the installation to make sure that all hardware is secure and tight.