



**RUST  
BUSTER**  
FRAMEWORKS

**RB2068**  
**'87-'95 YJ Wrangler**  
**Front & Rear Lubeable Shackles**



**REQUIRED TOOLS**

Ratchet  
(2)  $\frac{3}{4}$ " Socket

**KIT CONTAINS**

- ① Steel Plate
- ②  $\frac{1}{2}$ " Zinc Plated Steel Bolt w/ Grease Fitting
- ③ .75" Steel Bushing
- ④ 1" Steel Bushing
- ⑤  $\frac{1}{2}$ " Hex Nut
- ⑥  $\frac{1}{2}$ " Zinc Plated Steel Bolt
- ⑦ Poly Bushing

**QTY**

4  
4  
4  
2  
6  
2  
8




- 1) The Greasable Bolts will need to be tightened to 30ft-lbs
- 2) The Steel center bolt will need to be tightened to 55ft-lbs
- 3) Each bolt will need to be re-tightened after 100 miles of use



**RUST  
BUSTER**  
FRAMEWORKS

**RB2068**  
**'87-'95 YJ Wrangler**  
**Front & Rear Lubeable Shackles**

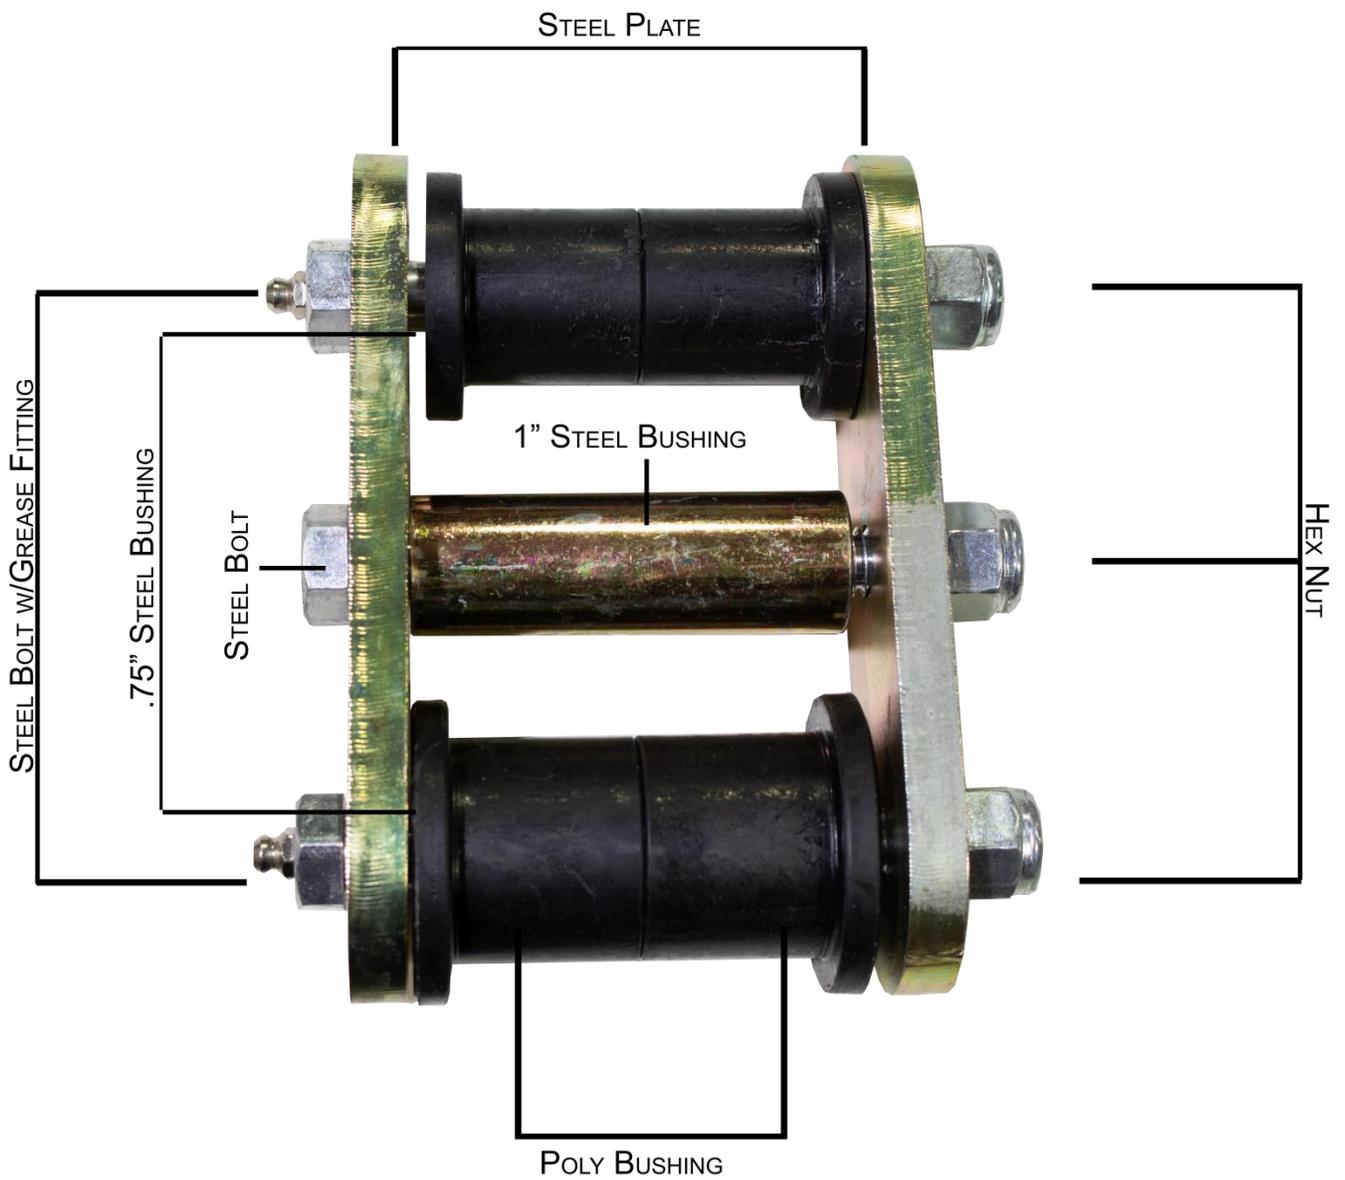



**RUST  
BUSTER**  
FRAMEWORKS

**RB2068**  
**'87-'95 YJ Wrangler**  
**Front & Rear Lubeable Shackles**

