


# AT-7217

MUFFLER ASSEMBLY, SLIP-ON  
2008-2022 CAN-AM DS 70 / DS 90 / DS 90 X

# MBRP®

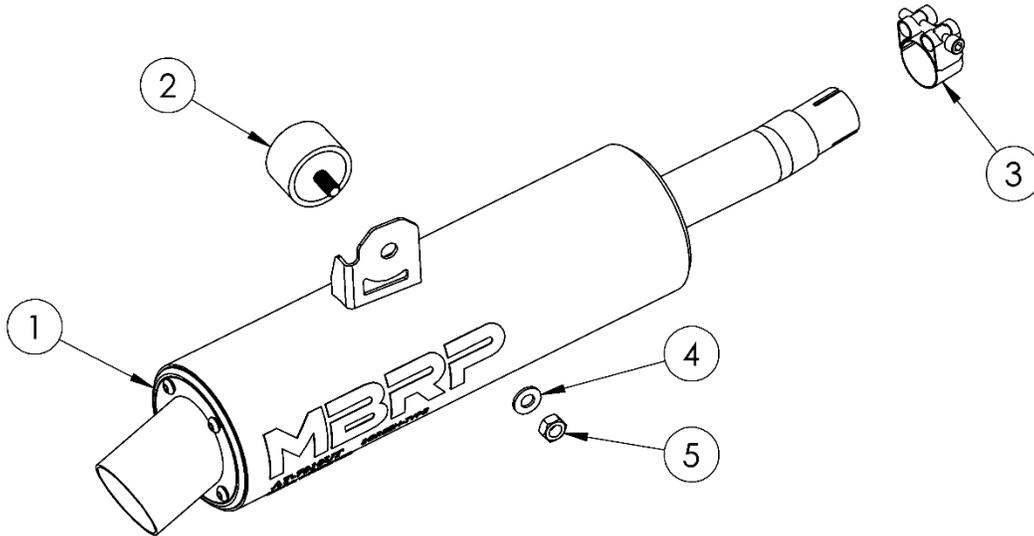

ITEM NO.	DESCRIPTION	QTY.
1	MUFFLER ASSEMBLY	1
2	RUBBER ISOLATOR	1
3	CLAMP	1
4	M8 WASHER	1
5	M8 NUT	1

Refer to this LOT NUMBER when contacting customer service: \_\_\_\_\_

## PLEASE READ BEFORE STARTING INSTALLATION

While MBRP has made every effort to ensure that all components of this system are of superior quality and properly packaged, it is the installer's responsibility to ensure the following before removal of the factory exhaust:

- that ALL components shown above are present.
- that ALL mating components fit together.
- that there are no damaged components.
- that the system you have purchased is appropriate for your vehicle year, model and configuration.
- that the system will not interfere with any modifications previously installed or planned.
- that you have read and understand these instructions.

If you have any questions or are uncertain about any aspect of the installation of this system to your vehicle please contact your dealer before commencing installation.

# MBRP



Figure 1

## Removal of Stock System

1. Apply penetrating lubricant liberally to all exhaust fasteners, hangers, and rubber insulators.
2. Loosen the clamp at the front of the muffler inlet pipe. (Remove seat and fender panel fasteners as needed for access).
3. Remove the (2) mounting bolts and then remove the muffler. Retain the factory mounting nuts and washers for reinstallation.

## Installation of **MBRP** Performance Exhaust

1. Using the factory M8 nut, install the **Rubber Isolator** at the rear mounting location. **Refer to Figure 1.**
2. Slip the **Muffler** inlet and **Clamp** over the front pipe, then mount the **Muffler** to the **Rubber Isolator** with the **M8 Washer** and **M8 Nut**. **Refer to Figure 2.**
3. Tighten the **Clamp** at the Muffler Inlet.

If a quieter tone is desired contact your local dealer to purchase T14373.



Figure 2

**Congratulations!** You are ready to begin experiencing the improved power, sound and driving experience of your **MBRP** Performance Exhaust. We know you will enjoy your purchase!

# MBRP

## Spark Arrestor Maintenance

In order to maintain optimal performance, the spark arrestor screen should be cleaned after every 30-35 hours of use.

### Clean-out Instructions:

Make sure the vehicle is cool before completing the clean-out procedure.

1. Using a 1/8" hex key, remove the 4 screws securing the outlet cap. (Figure 1).
2. Remove the outlet cap to expose the spark arrestor screen insert. (Figure 2)
3. Remove the screen insert. (Figure 3)
4. Using a wire brush, thoroughly brush the screen to remove residue. (Figure 4)
5. Replace the screen and cap.
6. Tighten the screws to 23 in-lbs (2.6 Nm).



**Figure 1**



**Figure 2**



**Figure 3**



**Figure 4**